

# SKIPPER EVO **275**

## FEATURES

codes: 09675/24/HX/EVO Automatic - 09676/24/HX/EVO Manual -  
09675/24/HX/EVO/H/ Automatic Manual

|                                                                                                    |                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Type</b>                                                                                        | Inflatable life jacket                                                                                                                                                       |
| <b>Activators</b>                                                                                  | UML MK5 - automatic<br>HAMMAR MA1/EC - automatic hammar<br>UML Micro Manual - manual<br>Oral tube on all versions                                                            |
| <b>Canister</b>                                                                                    | 60 g GAS threading                                                                                                                                                           |
| <b>Effective buoyancy</b>                                                                          | 290 N                                                                                                                                                                        |
| <b>Class</b>                                                                                       | 275                                                                                                                                                                          |
| <b>Fastening mechanism</b>                                                                         | Safety harness with a 45 mm strap, quick-release fastening system in acetal resin and integrated adjustment, double safety strap attachment with side-adjustment inox clasp. |
| <b>Certifications</b>                                                                              | ISO 12402-2, ISO 12401                                                                                                                                                       |
| <b>Size</b>                                                                                        | Adult                                                                                                                                                                        |
| <b>Weight supported</b>                                                                            | > 40 kg                                                                                                                                                                      |
| <b>Waist circumference</b>                                                                         | 80 - 125 cm                                                                                                                                                                  |
| <b>Casing</b>                                                                                      | PL 600D PU COATED material, black or blue in colours                                                                                                                         |
| <b>Chamber</b>                                                                                     | Single, PA 420 PU COATED material, fluorescent or yellow in colour                                                                                                           |
| <b>Product packaging</b>                                                                           | PL 600D PU COATED Carrying mesh case                                                                                                                                         |
| <b>Product dimensions</b>                                                                          | 50 x 30 x 5 cm +/- 5%                                                                                                                                                        |
| <b>Product weight</b>                                                                              | 1,700 g +/- 5% - Automatic<br>1,650 g +/- 5% - Manual<br>1,700 g +/- 5% - Automatic Manual                                                                                   |
| <b>Packaging</b>                                                                                   | 60 x 40 x 40 cm (16 pcs per box)                                                                                                                                             |
| <b>Warranty</b>                                                                                    | 24 months                                                                                                                                                                    |
| <b>Inspection</b>                                                                                  | Every 24 months                                                                                                                                                              |
| <b>Accessories on request</b>                                                                      | Sprayhood, automatic emergency light, safety line                                                                                                                            |
| <b>Spare parts</b>                                                                                 | Whistle, rearming kit                                                                                                                                                        |
| Veleria San Giorgio reserves the right to modify the technical specifications without prior notice |                                                                                                                                                                              |

## DONNING INSTRUCTIONS



# SKIPPER EVO 275

Inflatable life jacket, ISO 12402-3 certified, class 275, effective buoyancy 290 N, integrated ISO 12401 harness with quick-release clasp in acetal resin with side-adjustment inox clasp.

Designed for recreational activities carried out in the open sea and/or under adverse weather conditions, with the possibility to safely await rescue even in rough waters. Provides maximum safety for any type of navigation.

Easy and intuitive to wear, it offers the utmost freedom and mobility aboard during navigation manoeuvres.

## CASING FEATURES

- Collar in breathable mesh fabric
- Rear strap with backplate
- Zip cover closure
- Quick-release clasp
- Side-adjustment inox clasp
- Double ring for the safety line
- Rescue assistance loop behind the head
- Lifting handle
- Available in two colors:


09675/24/HX/EVO/NE 09675/24/HXEVO/BL  
09676/24/HX/EVO/NE 09676/24/HX/EVO/BL  
09675/24/HX/EVO/H/NE 09675/24/HX/EVO/H/BL



BLACK



BLUE ROYAL

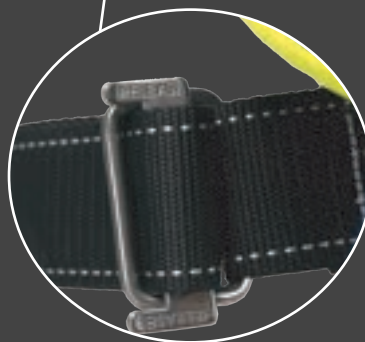

## VERSIONS


| CODE               | PRODUCT NAME    | ACTIVATION | ACTIVATORS      |
|--------------------|-----------------|------------|-----------------|
| 09675/24/HX/EVO    | SKIPPER EVO 275 | AUTOMATIC  | UML MK5         |
| 09676/24/HX/EVO/H/ | SKIPPER EVO 275 | HAMMAR     | HAMMAR MA1/EC   |
| 09675/24/HX/EVO    | SKIPPER EVO 275 | MANUAL     | UML MICROMANUAL |

# SKIPPER EVO 275


Floatation chamber with single compartment in PA 420 PU COATED material with electronically-controlled high-frequency welds. Provides optimal positioning and perfect stability in the water. The thrust rotates an unconscious person and angles them so as to keep their airway free of water. What's more, once the chamber is inflated, it is possible to swim unimpeded to reach safety or to quickly climb into a lifeboat.

## ACTIVATION SYSTEMS:


- Automatic: upon falling into the water, the system automatically activates within 5 seconds of submersion, with the inflation of the floatation chamber. Automatic activation is possible with the salt activator UML MK5 and HAMMAR MA1/EC, through the dissolution of a water-soluble tablet.
- Manual: the system is operated through pulling the dedicated lever. The product comes with the UML MICROMANUAL activator booklet and is activated exclusively by hand.
- Oral: this type of inflation is achieved via the special mouth tube, with a non-return valve and protective cap. To inflate the chamber, simply blow into the tube.

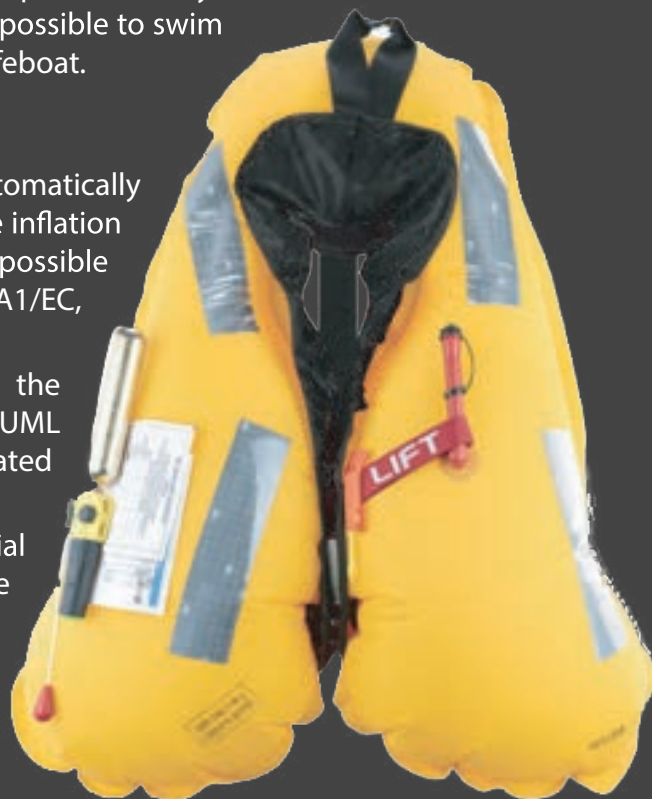

## SPIN



## INCLINATION

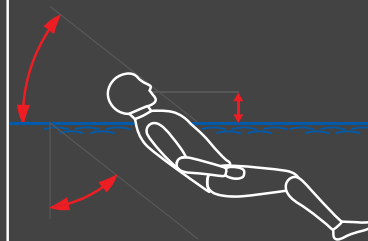

# SKIPPER EVO 275

## SPARE PARTS

|                                                                                   |         |       |                                                                                                                         |
|-----------------------------------------------------------------------------------|---------|-------|-------------------------------------------------------------------------------------------------------------------------|
|  | Whistle | 25180 | Rearming<br>UML: rearming kit (26233), water-soluble tablet (25005), green MK5 pin (25003/MK5)<br>Canister 33 g (26033) |
|-----------------------------------------------------------------------------------|---------|-------|-------------------------------------------------------------------------------------------------------------------------|

## ACCESSORIES

|                                                                                     |                          |          |                                                                                      |                      |       |
|-------------------------------------------------------------------------------------|--------------------------|----------|--------------------------------------------------------------------------------------|----------------------|-------|
|    | Elast. 2 aluminium hooks | 11177    |    | 2 aluminium hooks    | 11174 |
|   | 3 aluminium hooks        | 11175    |   | Elast. 2 steel hooks | 11176 |
|  | 2 steel hooks            | 11173    |  | Steel hook + ring    | 11178 |
|  | Sprayhood                | 09145/SK |  | LED light            | 03030 |
|  | Crotch strap             | 09146    |                                                                                      |                      |       |



Remember to conduct a periodic inspection.  
Book an inspection now by emailing us at: [info@veleriasangiorgio.com](mailto:info@veleriasangiorgio.com)



For more information, contact us at +39 0185 467701 or via our website [veleriasangiorgio.com](http://veleriasangiorgio.com)



To buy or learn more about this product, please refer to the QR code or visit [veleriasangiorgio.com](http://veleriasangiorgio.com)



LIFE JACKETS AND LIFEBELTS, FLAGS AND BANNERS, TECHNICAL ITEMS, PERSONAL PROTECTIVE EQUIPMENT AND SAFETY

GEAR FOR CIVILIAN AND MILITARY FIELDS

Via Alcide De Gasperi, 37H - 16030 Casarza Ligure - Genoa - Italy

Tel. +39 0185 467701 - Fax +39 0185 467050 - [info@veleriasangiorgio.com](mailto:info@veleriasangiorgio.com) - [www.veleriasangiorgio.com](http://www.veleriasangiorgio.com)

