

# SPINNAKER EASYFIT HX 180

Inflatable lifejacket compliant with ISO 12402-3, Class 150. Actual buoyancy: >180 N. Designed to provide the perfect balance of safety, comfort and design.

Its ergonomic design naturally conforms to the body, distributing weight evenly and ensuring a secure, comfortable fit even during prolonged use. The compact, modern profile minimizes bulk while providing complete freedom of movement during navigation and onboard operations.

The innovative integrated safety harness, compliant with ISO 12401 and Veleria San Giorgio's new **Oyster** safety buckle system, ensure easy donning, precise adjustment, and superior **comfort in all conditions**.

Designed for recreational boating, it features an ergonomic design and a carefully engineered fit to provide maximum comfort even during prolonged use, while ensuring complete freedom of movement in every onboard situation.

## MAIN CHARACTERISTICS:

- Buoyancy > 180 N
- Integrated safety harness ISO 12401
- Adjustable back strap
- Waterproof cover zipper
- Adjustable crotch strap
- Soft, breathable mesh lining
- Rear reflective patch
- Adjustable waist belt with red topstitching

Available in two colour options: ● ●



| CODE                     | PRODUCT NAME                | ACTIVATION | ACTIVATOR       |
|--------------------------|-----------------------------|------------|-----------------|
| 09330/25/HX/EASYFIT      | SPINNAKER EASYFIT 180       | AUTOMATIC  | UML MK5         |
| 09330/25/HX/H/EASYFIT    | SPINNAKER EASYFIT 180       | AUTOMATIC  | HAMMAR MA1/EC   |
| 09331/25/HX/EASYFIT      | SPINNAKER EASYFIT 180       | MANUAL     | UML MICROMANUAL |
| 09330/25/HX/EASYFIT/NE   | SPINNAKER EASYFIT 180 BLACK | AUTOMATIC  | UML MK5         |
| 09330/25/HX/H/EASYFIT/NE | SPINNAKER EASYFIT 180 BLACK | AUTOMATIC  | HAMMAR MA1/EC   |
| 09331/25/HX/EASYFIT/NE   | SPINNAKER EASYFIT 180 BLACK | MANUAL     | UML MICROMANUAL |

| FEATURES:                                                                                                                                                      |                                                                                                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Codes: 09330/25/HX/EASYFIT - 09330/25/HX/H/EASYFIT - 09331/25/HX/EASYFIT - 09330/25/HX/EASYFIT/BLACK - 09330/25/HX/H/EASYFIT/BLACK - 09331/25/HX/EASYFIT/BLACK |                                                                                                                                                                                                                                                                                                   |
| Type                                                                                                                                                           | Inflatable Lifejacket                                                                                                                                                                                                                                                                             |
| Activation systems                                                                                                                                             | UML MK5 - automatic : 09330/25/HX/EASYFIT 09330/25/HX/EASYFIT/BLACK<br>UML Micro Manual - manual : 09331/25/HX/EASYFIT - 09331/25/HX/EASYFIT/BLACK<br>Hammar MA1 EC – automatic : 09330/25/HX/H/EASYFIT - 09330/25/HX/H/EASYFIT/BLACK - 09330/25/HX/H/EASYFIT/BLACK<br>Oral tube on all versions. |
| CO2 gas cylinder                                                                                                                                               | 38 g Thread 1/2" GAS                                                                                                                                                                                                                                                                              |
| Real buoyancy                                                                                                                                                  | > 180 N                                                                                                                                                                                                                                                                                           |
| Class                                                                                                                                                          | 150 N                                                                                                                                                                                                                                                                                             |
| Certifications                                                                                                                                                 | EN ISO 12402-3 - EN ISO 12401                                                                                                                                                                                                                                                                     |
| Size                                                                                                                                                           | Adult                                                                                                                                                                                                                                                                                             |
| Supported User Weight                                                                                                                                          | > 40 kg                                                                                                                                                                                                                                                                                           |
| Cover                                                                                                                                                          | High-strength technical fabric                                                                                                                                                                                                                                                                    |
| Chamber                                                                                                                                                        | Single air chamber, made in 420 PA fabric with PU coating, in yellow                                                                                                                                                                                                                              |
| Packaging                                                                                                                                                      | 600D polyester mesh backpack                                                                                                                                                                                                                                                                      |
| Product Dimensions                                                                                                                                             | 50 x 33 x 9 cm ± 5%                                                                                                                                                                                                                                                                               |
| Product Weight                                                                                                                                                 | 09330/25/HX/EASYFIT - 09330/25/HX/EASYFIT/BLACK: 1147 g approx<br>09330/25/HX/H/EASYFIT - 09330/25/HX/H/EASYFIT/BLACK : 1134 g approx<br>09331/25/HX/EASYFIT - 09331/25/HX/H/EASYFIT/BLACK : 1090 g approx                                                                                        |
| Packaging                                                                                                                                                      | 60 x 40x 40 cm (10 pcs per box)                                                                                                                                                                                                                                                                   |
| Service                                                                                                                                                        | Every 24 months                                                                                                                                                                                                                                                                                   |
| Accessories on demand                                                                                                                                          | Sprayhood, SOLAS/M.E.D. Lifejacket Light , safety line                                                                                                                                                                                                                                            |
| Spare parts                                                                                                                                                    | Whistle, Rearming kit, Crotch strap                                                                                                                                                                                                                                                               |
| Veleria San Giorgio reserves the right to change product specifications without prior notice.                                                                  |                                                                                                                                                                                                                                                                                                   |

## DONNING INSTRUCTIONS



1 Put on the lifejacket.



2 Fasten the buckle.



3 Adjust the waist strap.

Single-chamber buoyancy chamber made in 420 PA fabric with a PU coating with electronically controlled high-frequency welded seams to ensure maximum airtightness and long-term durability.

Designed to ensure an optimal in-water body position and excellent stability, the buoyancy chamber provides sufficient buoyancy to automatically turn an unconscious person face-up, keeping the airways clear of the water.

Even when fully inflated, its ergonomic design allows the wearer to swim comfortably, enabling them to reach a place of safety or quickly board a liferaft, while maintaining freedom of movement and readiness in emergency situations.

#### ACTIVATION SYSTEMS:

The lifejacket incorporates three methods of activation systems:

- **Automatic activation**

In the event of a man overboard incident, the inflation system automatically inflates the buoyancy chamber within 5 seconds after immersion.

Automatic activation can be provided by the UML MK5 inflator, or equivalent Halkey-Roberts inflators, which use a water-soluble bobbin, or by the HAMMAR MA1/EC inflator, which operates using a hydrostatic activation system.

- **Manual activation**

The buoyancy chamber can be inflated manually by pulling the activation cord. The system may be equipped with a UML MICROMANUAL inflator or equivalent Halkey-Roberts inflators.

- **Oral inflation**

As an emergency or supplementary inflation method, the buoyancy chamber can be inflated via the oral inflation tube, which is fitted with a non-return valve and protective cap. Simply blow into the tube to inflate or top up the buoyancy chamber as required.



## SPARE PARTS

|                                                                                   |                                                                                                   |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
|  | <b>Crotch strap</b> code 09146                                                                    |
|                                                                                   | The use of this accessory improves the wearer's body angle, stability, and position in the water. |

|                                                                                    |                                                                                   |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  | <b>Whistle</b> code 25180                                                         |
|                                                                                    | Mandatory accessory providing an audible emergency signal. ISO 12402-8 certified. |

|                                                                                  |                                                                                 |
|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
|  | <b>ID badge holder</b> code 652/PB                                              |
|                                                                                  | Ideal for the secure and professional identification of personnel and visitors. |

|                                                                          |  |
|--------------------------------------------------------------------------|--|
| <b>Rearming kit:</b>                                                     |  |
| UML MK5: Rearming kit (26233), 33 g CO <sub>2</sub> gas cylinder         |  |
| UML MICROMANUAL: Rearming kit (26233), 33 g CO <sub>2</sub> gas cylinder |  |
| HAMMAR MA1/EC: Rearming kit (26233), 33 g CO <sub>2</sub> gas            |  |

## ACCESSORIES

|                                                                                  |                                                                 |
|----------------------------------------------------------------------------------|-----------------------------------------------------------------|
|  | <b>2 steel hooks</b><br>code 11173/OVER                         |
|                                                                                  | Safety lanyard<br>Length: 2 metres<br>Material: stainless steel |

|                                                                                    |                                                           |
|------------------------------------------------------------------------------------|-----------------------------------------------------------|
|  | <b>2 Aluminium Hooks</b><br>code 11174/OVER               |
|                                                                                    | Safety lanyard<br>Length: 2 metres<br>Material: aluminium |

|                                                                                   |                                                                 |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------|
|  | <b>Elastic with 2 steel hooks</b><br>code 11176/OVER            |
|                                                                                   | Safety lanyard<br>Length: 2 metres<br>Material: stainless steel |

|                                                                                     |                                                           |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------|
|  | <b>Elastic with 2 Aluminium Hooks</b><br>code 11177/OVER  |
|                                                                                     | Safety lanyard<br>Length: 2 metres<br>Material: aluminium |

|                                                                                     |                                                                                                                                                               |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>Sprayhood</b> code 09145/SK                                                                                                                                |
|                                                                                     | Reduces the risk of secondary drowning caused by the inhalation of sea spray. Improves the visibility and detection of the casualty during rescue operations. |

|                                                                                      |                                                                 |
|--------------------------------------------------------------------------------------|-----------------------------------------------------------------|
|  | <b>Steel hook + ring</b><br>code 11178/OVER                     |
|                                                                                      | Safety lanyard<br>Length: 2 metres<br>Material: stainless steel |

|                                                                                    |                                                               |
|------------------------------------------------------------------------------------|---------------------------------------------------------------|
|  | <b>3 Aluminium Hooks</b><br>code 11175/OVER                   |
|                                                                                    | Safety lanyard<br>Length: 1.4-2 metres<br>Material: aluminium |

|                                                                                      |                                                                                                                                        |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>LED Light</b> code 03030                                                                                                            |
|                                                                                      | Activates automatically upon immersion in water. Provides visibility up to 1 nautical mile. SOLAS/ M.E.D. certified and USCG approved. |

|                                                                                     |                                                  |
|-------------------------------------------------------------------------------------|--------------------------------------------------|
|  | <b>Cover for Hammar activator</b><br>code 1278/1 |
|                                                                                     | Protective rubber cover for HAMMAR activator     |



Remember to book a periodic inspection by emailing [info@valeriasangiorgio.com](mailto:info@valeriasangiorgio.com) or on the website.

For more information, please contact us by calling +39 0185 467701 or via [www.valeriasangiorgio.com](http://www.valeriasangiorgio.com).

To buy or learn more about this product, please scan the QR Code or visit [www.valeriasangiorgio.com](http://www.valeriasangiorgio.com).

LIFE JACKETS AND LIFEBELTS, FLAGS AND BANNERS, TECHNICAL ITEMS, PERSONAL PROTECTIVE EQUIPMENT AND SAFETY GEAR FOR CIVILIAN AND MILITARY FIELDS Via Alcide De Gasperi, 37H - 16030 Casarza Ligure - Genoa - Italy Tel. +39 0185 467701 - Fax +39 0185 467050 - [info@valeriasangiorgio.com](mailto:info@valeriasangiorgio.com) - [www.valeriasangiorgio.com](http://www.valeriasangiorgio.com)



**VELERIA  
SAN GIORGIO®**


LIFEJACKET MANUFACTURER

# ESCLUSIVE SAFETY TECNOLOGIES

Safety at sea is our main priority. We manage all research, design and production processes with the utmost care so as to offer certified equipment for all nautical fields, with the highest production standards. All research and development activities are certified by the Department of Applied Science and Technology of the Polytechnic University of Turin, in accordance with EU regulations.

## THE PRODUCTION PROCESS AND TRACEABILITY

With the aim of making inflatable life jackets more reliable, in 1994 Veleria San Giorgio introduced the Unique Product Code system. As the only manufacturer in the world to employ this type of technology, VSG is now able to identify all materials and individual components utilised through distinct alphanumeric codes.

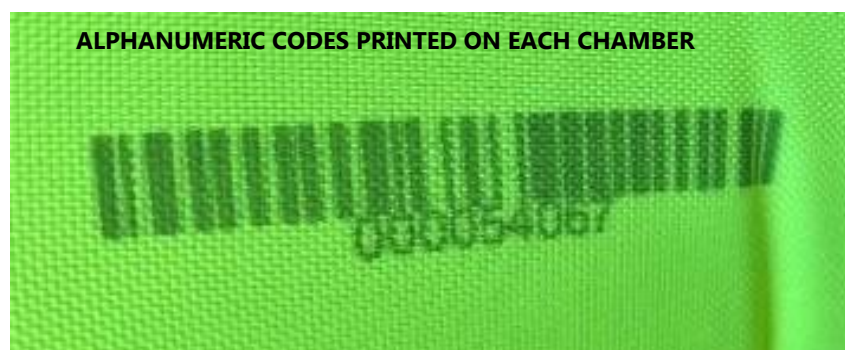

### CERTIFICATO N. CERTIFICATE No.

26/91/S

SI CERTIFICA CHE IL SISTEMA DI GESTIONE PER LA QUALITÀ DI  
IT IS HEREBY CERTIFIED THAT THE QUALITY MANAGEMENT SYSTEM OF

**VELERIA SAN GIORGIO S.R.L.**

VIA A DE GASPERI 37H 16030 Casarza Ligure (GE) ITALIA  
NELLE SEGUENTI UNITÀ OPERATIVE / IN THE FOLLOWING OPERATIONAL UNITS

VIA A DE GASPERI 37H 16030 Casarza Ligure (GE) ITALIA

È CONFORME ALLA NORMA / IS IN COMPLIANCE WITH THE STANDARD  
**ISO 9001:2015**

Production processes are controlled via software specially developed by VSG, covering 100% of production so each product can be traced back to its buyer with absolute precision. This drastically reduces manufacturing defects (less than 1/10000 of returns), guaranteeing each buyer a unique product in the truest sense of the word and - most importantly - the highest degree of safety when needed.

Thanks to their ergonomic features, our life jackets guarantee an optimal position in the water and great stability. In addition, the vests offer enough buoyancy to rotate and tilt an unconscious person, so as to always keep the airway out of the water.

## Spin - tilt

